

MODEL NO. : RJ-SMT-007NA2


Features:

- ⊙ RoHS Compliant
- ⊙ Meets IEEE802.3 Baseline Wander Compensation specification
- ⊙ Operating Temp Range : -30°C To +85°C
- ⊙ VOLTAGE RATING: 150VAC max.
- ⊙ CURRENT RATING: 1.5A max.
- ⊙ Dielectric Voltage : 1000 V RMS 60Hz 1minute
- ⊙ Insulation Resistance : 30 milliohms max. initial
- ⊙ Design for 100BASE-TX Transmission over UTP-5 cable.
- ⊙ Retention Force Of Plug In The Jack Is 10Kgf(min.)

Materials:


- ⊙ Plastic Housing : (FR52). Polyester UL 94V-0
- ⊙ Contacts: Selective Gold plating
- ⊙ Plating (15 μ"): Gold Plating Over Nickel in Contact, Tin Plating Over Nickel in Solder Area.
- ⊙ Shield: 0.20mm Thickness C2680 Alloy With Au and Nickel Plated

Ordering Information

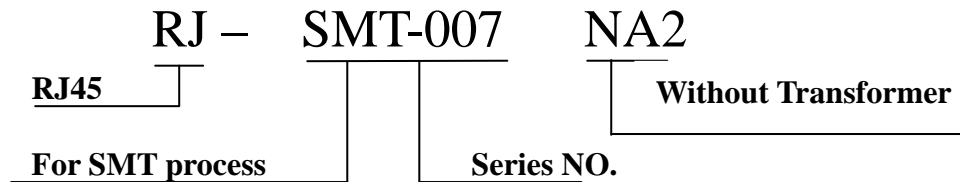


Dimension: mm

TOLERANCE:±0.15

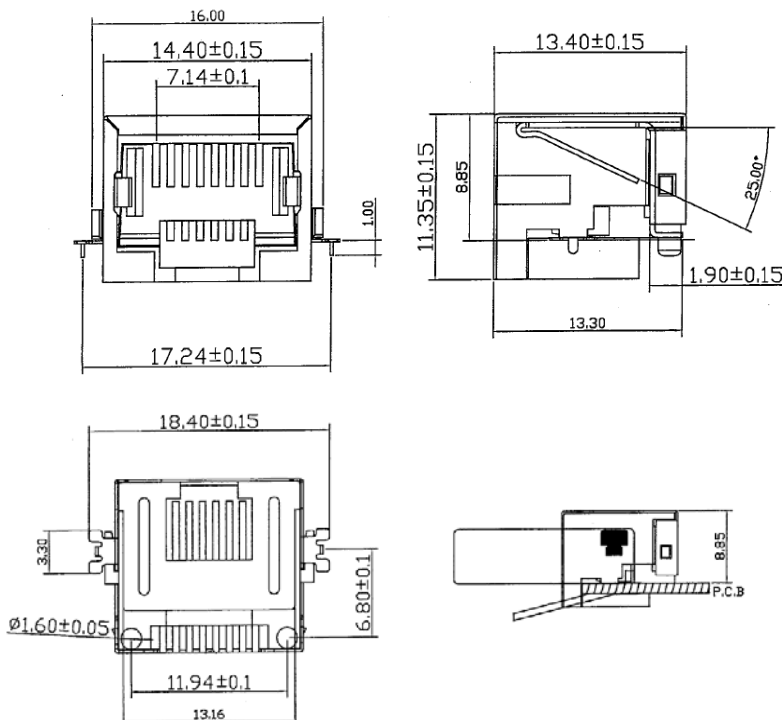

MODEL NO. : RJ-SMT-007NA2

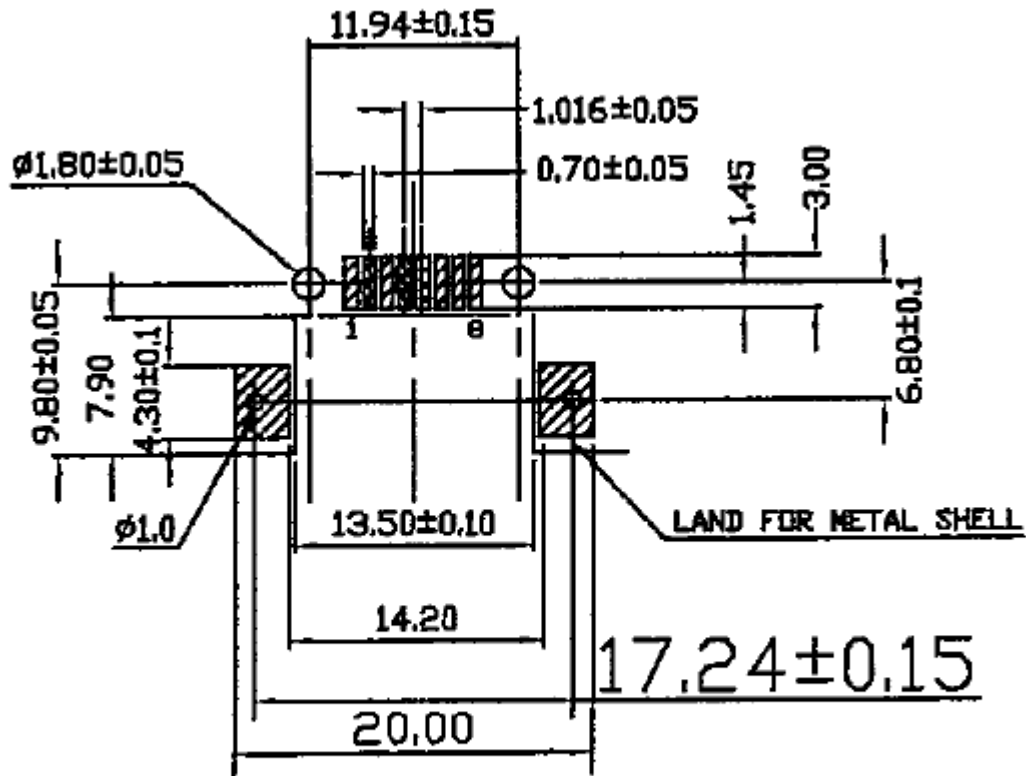

PCB LAYOUT