

NUMBER:RD-SD9766-881X-S3L2-D-A (UJ) DATE: 2006/08/18 R(REV:A1)

MODEL NO.: RJL21-002NC1


Features:

- **O** RoHS Compliant
- Meets IEEE802.3 Baseline Wander Compensation specification
- Operating Temp Range: -40°C ~ +85°C
- O VOLTAGE RATING: 125VAC
- **O CURRENT RATING: 1.5A**
- O Dielectric Voltage: 1500 V RMS 60Hz 1minute

Materials:

- O Plastic Housing: Engineering Thermoplastic
 - Flammability Rating UL 94V-0
- O Contacts: 0.45mm Thickness Phosphor Bronze Alloy Selective Gold Plating Over Nickel
- O Plating (6μ"): Gold Plating Over Nickel in Contact, Tin Plating Over Nickel in Solder Area
- Shield: 0.25mm Thickness Copper Alloy With Tin Plated

Ordering Information

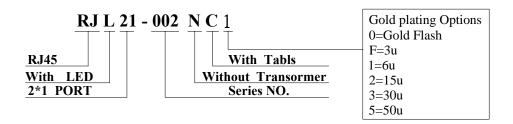

Dimension: mm

TOLERANCE:±0.15 (unless otherwise specified)

