

ENTERPRISE BootSystem

# PCIe Gen 4 Ultimate M.2 Boot Drive for Servers and Workstations

Sequential read

up to 5 000 MB/s

Sequential write

up to 700 MB/s

Random read

up to 450 000 IOPS

Random write

up to 30 000 IOPS

Interface

PCIe 4.0 x4

Capacity

up to 960 GB

Form factor

M.2 2280

DWPD

1



## Product features

- NVMe 1.4
- AES-XTS 256-bit Encryption
- TCG Opal 2.0 support
- End-to-End Data Path Protection
- NVMe-MI (Management Interface)
- Power Loss Protection (PLP)
- Sanitize

# Solutions - BS05M

Form factor M.2 2280		
Capacity <sup>(1)</sup>	480 GB	960 GB
Interface	PCIe 4.0 x4	PCIe 4.0 x4
NVMe	1.4	1.4
NAND Flash	3D TLC	3D TLC
Performance <sup>(2,3,4,5)</sup>		
Sequential read to (MB/s)	4 000	5 000
Sequential write to (MB/s)	300	700
4K random read to (IOPS)	250 000	450 000
4K random write to (IOPS)	15 000	30 000
Read latency (Typ.,µs)	75	80
Write latency (Typ.,µs)	40	35
Power consumption <sup>(6)</sup>		
Active (W)	5.9	8.5
Idle (W)	3.5	3.5
Endurance/Reliability		
DWPD <sup>(7)</sup>	1	1
TBW <sup>(8)</sup>	850 TB	1,8 PB
UBER <sup>(9)</sup>	< 1 sector per 10 <sup>17</sup> bits read	< 1 sector per 10 <sup>17</sup> bits read
MTBF (hours) <sup>(10)</sup>	2 000 000	2 000 000
Limited warranty (years) <sup>(11)</sup>	5	5
Temperature		
Operating temp. (°C)	0 – 70	0 – 70
Non-operating temp. (°C)	-40 – 85	-40 – 85
Physical dimension		
Length (mm)	80.00	80.00
Width (mm)	22.00	22.00
Height (mm)	4.08	4.08
Weight(g)	11.00	11.00


\* A detailed explanation of symbols and markings is provided on the final page.



The data within this specification is subject to change by Wilk Elektronik S.A. without notice.  
Performance numbers may vary based on system.  
Copyright © 2025 Wilk Elektronik S.A. All rights reserved. configuration and testing conditions.

Find more information and resources at: [goodram.com/en/categories/server-memory-en/](https://goodram.com/en/categories/server-memory-en/)

# Decoder P/N

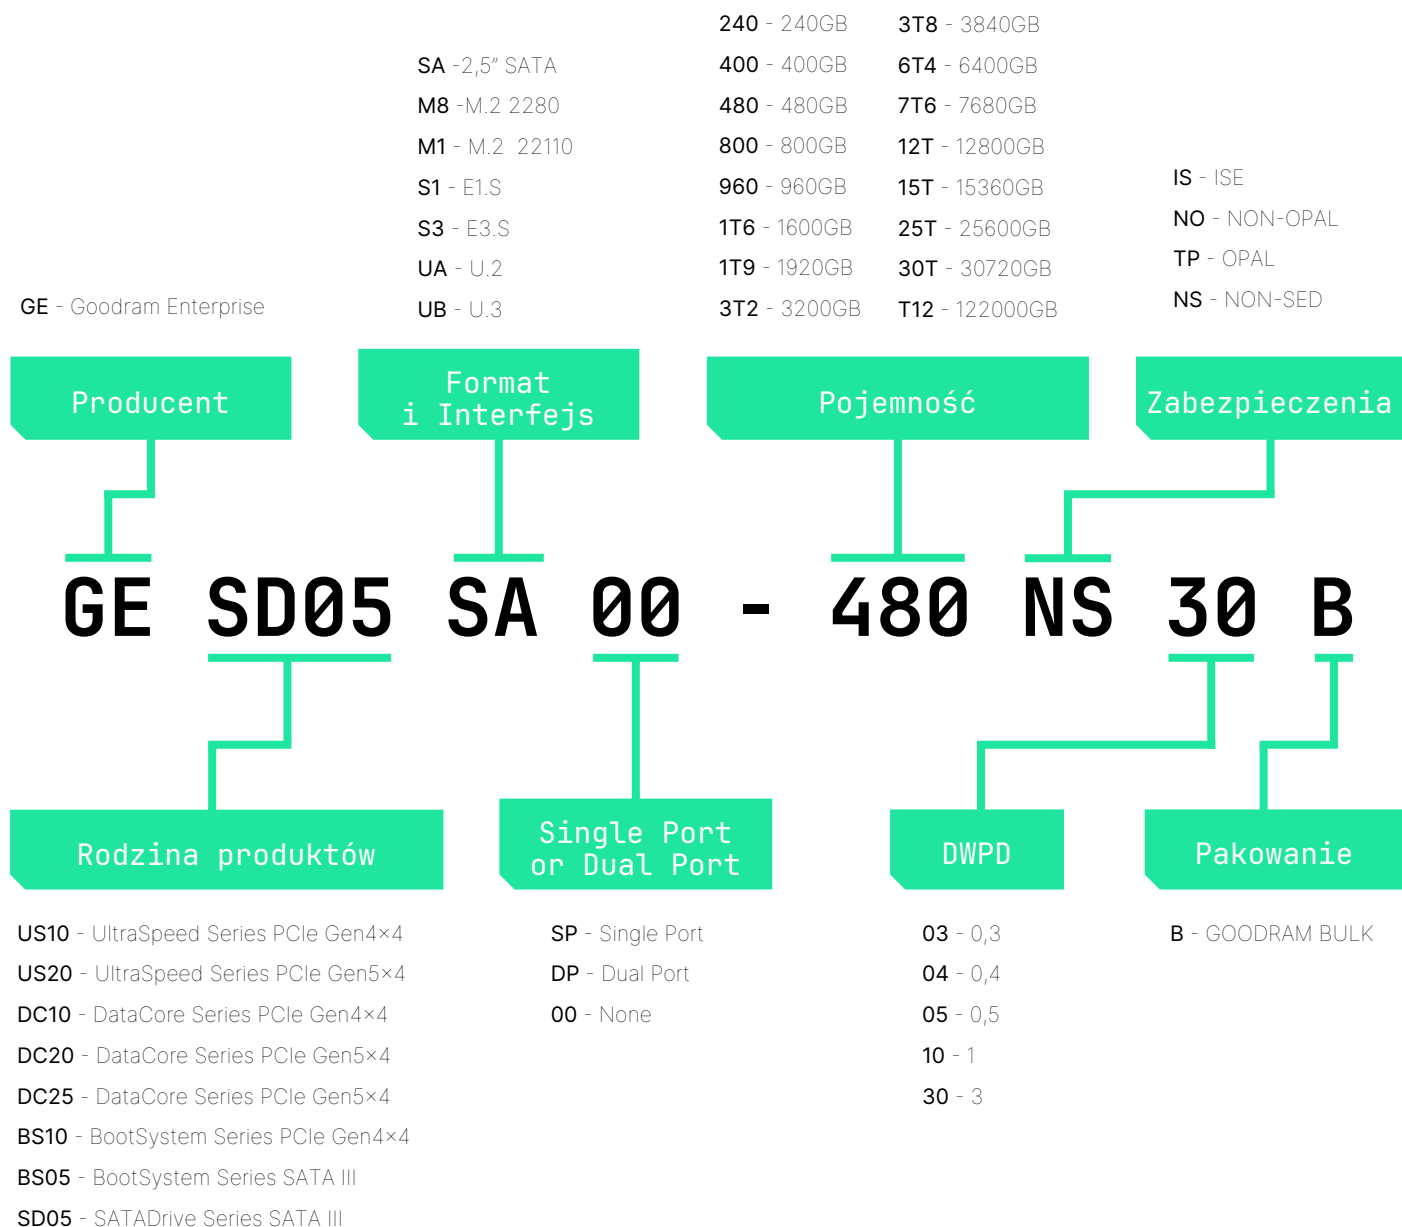

# Glossary

- (1) 1 TB =  $10^{12}$  bytes.
- (2) Sequential Performance is based on FIO on Linux, 128 K, with QD=32, 1 worker.
- (3) Random Performance is based on FIO on Linux, 4 K data size, QD=32, 8 workers.
- (4) Latency is measured with random workloads based on FIO on Linux, 4 KB data size, QD=1, 1 worker.
- (5) Sequential performance is based on FIO (Flexible I/O Tester - an open source tool used to measure the performance of input/output (I/O) operations for disk drives and storage systems under various test scenarios) on Linux, 128 K, with QD=32, 1 worker.
- (6) Power consumption (Maximum RMS) is measured during the sequential read/write and random read/write operations performed by iometer with the conditions described in (2)(3).
- (7) The results of DWPD are obtained in compliance with JESD219A Standards.
- (8) 1 PB = 1000 TB, 1 TB =  $10^{12}$  bytes.
- (9) UBER (Uncorrectable Bit Error Rate) – a measure of data storage reliability, indicating the number of uncorrectable bit errors per amount of data read. This value shows how often errors may occur that cannot be corrected using internal ECC (Error Correction Code) mechanisms.
- (10) Please note that a lower MTBF should be expected for higher capacity drives, and we apply the lowest MTBF for all capacities.
- (11) WESA/Wilk Elektronik SA warrants to the purchaser of the product that it will comply with the specifications for five (5) years from the date of delivery or until the total number of stored terabytes specified in the S.M.A.R.T. attribute is exceeded, whichever occurs first.